

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 June 2004 (17.06.2004)

PCT

(10) International Publication Number
WO 2004/051969 A1

(51) International Patent Classification⁷: **H04M 1/253**

(21) International Application Number:
PCT/IB2003/005456

(22) International Filing Date:
26 November 2003 (26.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/430,918 4 December 2002 (04.12.2002) US

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]**;
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SOUNDARARAJAN, Aravind [US/US]**; P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US).

(74) Common Representative: **KONINKLIJKE PHILIPS ELECTRONICS N.V.; INTELLECTUAL PROPERTY & STANDARDS**, c/o Waxler, Aaron, P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR A DUAL MODE TELEPHONE

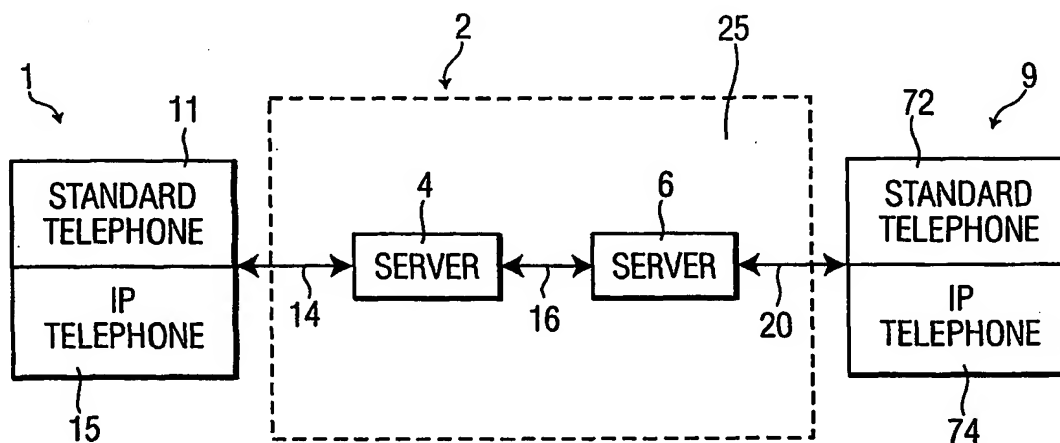

(57) Abstract: An apparatus and structure for transmitting and receiving an audio signal over a network (25). A dual mode telephone (1) is adapted to switch between a standard telephone mode and an Internet Protocol (IP) telephone mode. The standard telephone mode comprises a standard telephone (11) adapted to transmit and receive audio over a standard telephone network (37). The IP telephone mode comprises an IP telephone (15) adapted to convert an audio signal to an IP packet and transmit the IP packet over a communication link (14) to a network (25).

METHOD AND APPARATUS FOR A DUAL MODE TELEPHONE

The present invention relates to an apparatus and associated method to transmit and receive an audio signal over a computer network.

- 5 Transmitting and receiving an audio signal over a computer network typically requires the use of a computer system. A computer system may be costly and cumbersome. Thus there is a need for an apparatus and associated method to transmit and receive an audio signal over a computer network without the use of a computer system.

The present invention provides a dual mode telephone, comprising:

- 10 a telephone adapted to switch between a standard telephone mode and an Internet Protocol (IP) telephone mode, wherein the standard telephone mode comprises a standard telephone adapted to transmit and receive an audio signal over a standard telephone network, and wherein the IP telephone mode comprises an IP telephone adapted to convert the audio signal to an IP packet and transmit the IP packet over a communication link to a network.

- 15 The present invention provides, a method comprising:

providing a dual mode telephone comprising a standard telephone mode and an Internet Protocol (IP) telephone mode;

switching the dual mode telephone to the IP telephone mode;

converting, by the IP telephone mode, an audio signal to an IP packet ; and

- 20 transmitting the IP packet over a communication link to a network.

The present invention provides, a method comprising:

providing a dual mode telephone comprising a standard telephone mode and an Internet Protocol (IP) telephone mode;

switching the dual mode telephone to the standard telephone mode; and

- 25 transmitting and receiving in the standard telephone mode, an audio signal over a standard telephone network.

FIG. 1 depicts a block diagram view of a system with a dual mode telephone in Internet protocol (IP) mode in communication with a second dual mode telephone, in accordance with embodiments of the present invention.

- 30 FIG. 2 illustrates a variation of FIG. 1 depicting a block diagram view of a system with the dual mode telephone in IP mode in communication with a computing device, in accordance with embodiments of the present invention.

FIG. 3 depicts a block diagram view of a system with a dual mode telephone in IP mode in communication with a standard telephone, in accordance with embodiments of the present invention.

FIG. 4 depicts a block diagram view of a system with a dual mode telephone in standard telephone mode in communication with a standard telephone, in accordance with

FIG. 5 illustrates a flowchart depicting an algorithm of a communication process, in accordance with embodiments of the present invention.

FIG. 1 depicts a block diagram view of a system 2 comprising a dual mode telephone 1 in communication with a second dual mode telephone 9, in accordance with embodiments of the present invention. The dual mode telephone 1 comprises a standard telephone mode and an Internet protocol (IP) telephone mode. The standard telephone mode comprises a standard telephone 11 within the dual mode telephone 1. The standard telephone 11 may be any telephone known to a person of ordinary skill in the art and may include, inter alia, a corded telephone, a cordless telephone, a cellular telephone, etc. The standard telephone 11 may transmit and receive audio over any standard telephone network 37 (see FIG. 4) known to a person of ordinary skill in the art. The IP telephone mode comprises an IP telephone 15 within the dual mode telephone 1. The IP telephone 15 converts an audio signal to an IP packet and transmits the IP packet over a communication link 14 to a network 25. The term "IP packet" refers to herein one or more IP packets and may comprise audio and/or text. Additionally, the IP telephone 15 may digitize and compress the audio signal before converting it to the IP packet. The audio signal may be compressed by any compression technique known to a person of ordinary skill in the art. The audio signal may be digitized at any rate such as about 8000 times/ sec or about once every 125 Us @ 4 or 8 bits / sample. The network 25 may be, inter alia, a Transmission Control Protocol (TCP)/ IP network, a local area network (LAN), a wide area network (WAN), an Asynchronous transfer mode (ATM) network, etc. Additionally, the IP telephone 15 may receive a second IP packet comprising audio or a text message from the network 25 and convert the second IP packet to a second audio signal. The IP telephone 15 may additionally comprise a monitor to receive the text message in text form from a computing device (e.g., computing device 8 in FIG. 2). The monitor may be any monitor known to a person of ordinary skill in the art such as, inter alia, a liquid crystal display (LCD) monitor, a cathode ray tube (CRT) monitor, etc. The IP telephone 15 may comprise a TCP/IP stack.

The network 25 may comprise a server 4, a server 6, and communication links 14, 16, and 20. The server 4 may be associated with an Internet Service Provider (ISP). The server 6 may be associated with a second ISP. Alternatively, the network 4 may comprise only one server associated with one ISP. The communication links 14, 16, and 20 may be a solid medium link such as, inter alia, fiber-optic cable, twisted pair copper wire, coaxial cable, etc. Alternatively, the communication links 14, 16, and 20 may be a wireless medium link such as, inter alia, satellite, cellular, etc. The dual mode telephone 1 is adapted to input a telephone number for connection to a server. Additionally, the dual mode telephone 1 is adapted to directly input an IP address of a remote device for communication (e.g., a dual mode telephone 9). The dual mode telephone 1 may be switched between the standard telephone 11 and the IP telephone 15 at any time. The switching may be done manually using hardware. Alternatively, the switching may be done automatically using a handshaking process (e.g., see FIG. 5, step 28). The dual mode telephone 1 may communicate with a second dual mode telephone 9. The second dual mode telephone 9 comprising a standard telephone 72 and an IP telephone 74 is equivalent to the dual mode telephone 1 comprising the standard telephone 11 and an IP telephone 15.

FIG. 2 illustrates a variation of FIG. 1 depicting a block diagram view of a system 5 with the dual mode telephone 1, in accordance with embodiments of the present invention. In contrast with FIG. 1, the dual mode telephone 1 is in communication with a computing device 8. The computing device 8 may be any computing device known to a person of ordinary skill in the art such as, inter alia, a computer, a personal computer (PC), a portable web browser, a personal digital assistant (PDA), etc. The computing device 8 may convert an audio signal to an IP packet for transmission over the network 25. Alternatively, the computing device 8 may use messaging (e.g., instant messaging, text messaging, etc.) to convert text to an IP packet for communication with the dual mode telephone 1.

FIG. 3 illustrates a second variation of FIG. 1 depicting a block diagram view of a system 7 with the dual mode telephone 1 in IP mode in communication with a network 31, in accordance with embodiments of the present invention. In contrast with FIG. 1, the dual mode telephone 1 in IP mode is in communication with a standard telephone 12. The standard telephone 11 may be any telephone known to a person of ordinary skill in the art and may include, inter alia, a corded telephone, a cordless telephone, a cellular telephone, etc. In addition to the server 4 and the communication links 14 and 18, the network 31 comprises an IP voice gateway 10 and a communication link 55. The IP voice gateway 10

converts an IP packet to an audio signal for transmission over the communication link 55 to the standard telephone 12. The communication link 55 may be any standard telephone line known to a person of ordinary skill in the art.

FIG. 4 illustrates a variation of FIG. 3 depicting a block diagram view of a system with the dual mode telephone 1 in communication with the standard telephone 12, in accordance with embodiments of the present invention. In contrast with FIG. 3, the dual mode telephone 1 is in a standard telephone mode comprising a standard telephone 11.

Additionally, the dual mode telephone is communicating (transmitting and receiving audio) with the standard telephone 12 of FIG. 3 over a standard telephone network 37. The standard telephone network 37 may be any standard telephone network known to a person of ordinary skill in the art. The IP telephone 15 is not used with the standard telephone 12.

FIG. 5 illustrates a flowchart depicting an algorithm of a communication and switching process used in FIGS 1-4 for the dual mode telephone. 1 to communicate with various devices, in accordance with embodiments of the present invention. Step 26 represents a alpha/numeric user input to the IP telephone 1. The alpha/numeric user input may be a telephone number to an Internet service provider (ISP) or a telephone number to a server (e.g., the server 4 in FIG. 1). Alternatively, the alpha/numeric user input may be an IP address of a device (e.g., the dual mode telephone 9 in FIG. 1, the computing device 8 in FIG. 2, etc.) and the process may start at step 48. In step 28 a handshaking process takes place. If in step 28 the dual mode telephone 1 detects the standard telephone network 37 (see FIG. 4), the dual mode IP telephone 1 is switched to the standard telephone mode in step 30. In step 32 the IP telephone 1 is connected to the standard telephone 12 in FIG. 4. If in step 28 an Internet service provider (ISP) or server is detected by the dual mode telephone 1, the dual mode telephone 1 is switched to IP telephone mode in step 34. After step 34, a user may input a telephone number in step 36 to an intended party or an IP address to an intended party in step 48 to the dual mode telephone 1. If the user inputs the telephone number in step 36, the telephone number is converted to an IP address to the IP voice gateway 10 (see FIG. 3) in step 38. In step 40, an audio signal (e.g., the user's voice) is converted to an IP packet and in step 42 the IP packet is transmitted to the IP voice gateway 10 of FIG. 3. In step 44, the IP voice gateway 10 converts the IP packet to an audio signal. In step 46, the IP voice gateway 10 transmits the audio signal to the standard telephone 12 of FIG. 3. If the user inputs the IP address in step 48, then the dual mode telephone will convert an audio signal to an IP packet in step 50. In step 52, a

second handshaking process may take place. If in step 52 a second IP telephone 9 (see FIG. 1) is detected then the IP packet is transmitted to the second IP telephone 9 in step 54. In step 56, the IP packet is converted back to an audio signal. If in step 52 a computing device 8 (see FIG. 2) is detected then the IP packet is transmitted to the computing device in step 58. In step 60, a communication process takes place with a computing device user as discussed supra in the description of FIG. 2.

While embodiments of the present invention have been described herein for purposes of illustration, many modifications and changes will become apparent to those skilled in the art. Accordingly, the appended claims are intended to encompass all such modifications and changes as fall within the true spirit and scope of this invention.

CLAIMS:

1. A dual mode telephone, comprising:
a telephone adapted to switch between a standard telephone mode and an Internet Protocol (IP) telephone mode, wherein the standard telephone mode comprises a standard telephone adapted to transmit and receive an audio signal over a standard telephone network, and wherein the IP telephone mode comprises an IP telephone adapted to convert the audio signal to an IP packet and transmit the IP packet over a communication link to a network.
2. The dual mode telephone of claim 1, wherein the IP telephone is adapted to receive a second IP packet from the network and convert the second IP packet to a second audio signal.
3. The dual mode telephone of claim 2, wherein the dual mode telephone comprising the IP telephone is adapted to transmit the IP packet over the network to a second dual mode telephone comprising a second IP telephone, wherein the second IP telephone is adapted to receive the IP packet and convert the IP packet to the audio signal, and wherein the second IP telephone is adapted to convert the second audio signal to the second IP packet and transmit the second IP packet over the network.
4. The dual mode telephone of claim 2, wherein the dual mode telephone comprising the IP telephone is adapted to transmit the IP packet over the network to a computing device, and wherein the IP telephone is adapted to receive the second IP packet from the computing device.
5. The dual mode telephone of claim 4, wherein the computing device is selected from the group consisting of a computer, a portable web browser, and a personal digital assistant (PDA).
6. The dual mode telephone of claim 1, wherein the dual mode telephone comprising the IP telephone is adapted to transmit the IP packet over the network, wherein the network further comprises an IP voice gateway, and wherein the IP voice gateway is adapted to

convert the IP packet to the audio signal and transmit the audio signal to a standard telephone.

7. The dual mode telephone of claim 1, wherein the communication link is a wireless communication link.
8. The dual mode telephone of claim 1, wherein the IP telephone is adapted to accept an alpha/numeric input.
9. The dual mode telephone of claim 8, wherein the alpha/numeric input is an IP address.
10. The dual mode telephone of claim 8, wherein the alpha/numeric input is a telephone number.
11. The dual mode telephone of claim 1, wherein the IP telephone comprises a Transmission Control Protocol (TCP)/IP stack.
12. The dual mode telephone of claim 1, wherein the switching between the standard telephone mode and the Internet Protocol telephone mode is determined by a handshaking process.
13. A method comprising:
providing a dual mode telephone comprising a standard telephone mode and an Internet Protocol (IP) telephone mode, wherein the standard telephone mode comprises a standard telephone, and wherein the IP telephone mode comprises an IP telephone ;
switching the dual mode telephone to the IP telephone;
converting, by the IP telephone, an audio signal to an IP packet ; and
transmitting the IP packet over a communication link to a network.
14. The method of claim 13, further comprising receiving by the dual mode telephone a second IP packet from the network and converting the second IP packet to a second audio signal.

15. The method of claim 13, wherein the IP packet is adapted to be received by a second dual mode telephone from the network and converted by the second dual mode telephone to an audio signal.
16. The method of claim 15, wherein a second audio signal is adapted to be converted by the second dual mode telephone to a second IP packet, and wherein the second IP packet is adapted to be transmitted to the network.
17. The method of claim 16, further comprising receiving by the dual mode telephone the second IP packet from the network and converting the second IP packet to the second audio signal.
18. The method of claim 13, further comprising transmitting the IP packet over the network, wherein the network further comprises an IP voice gateway adapted to; convert the IP packet to the audio signal; and transmit the audio signal to a standard telephone.
19. The method of claim 14, further comprising transmitting the IP packet over the network to a computing device.
20. The method of claim 19, further comprising receiving by the dual mode telephone the second IP packet from the computing device.
21. The method of claim 19, wherein the computing device is selected from the group consisting of a computer, a portable web browser, and a personal digital assistant (PDA).
22. The method of claim 13, further comprising determining the switching by a handshaking process.
23. A method comprising:
providing a dual mode telephone comprising a standard telephone mode and an Internet Protocol (IP) telephone mode, wherein the standard telephone mode comprises a standard telephone, and wherein the IP telephone mode comprises an IP telephone;

switching the dual mode telephone to the standard telephone; and
transmitting and receiving by the standard telephone, an audio signal over a standard
telephone network.

1/3

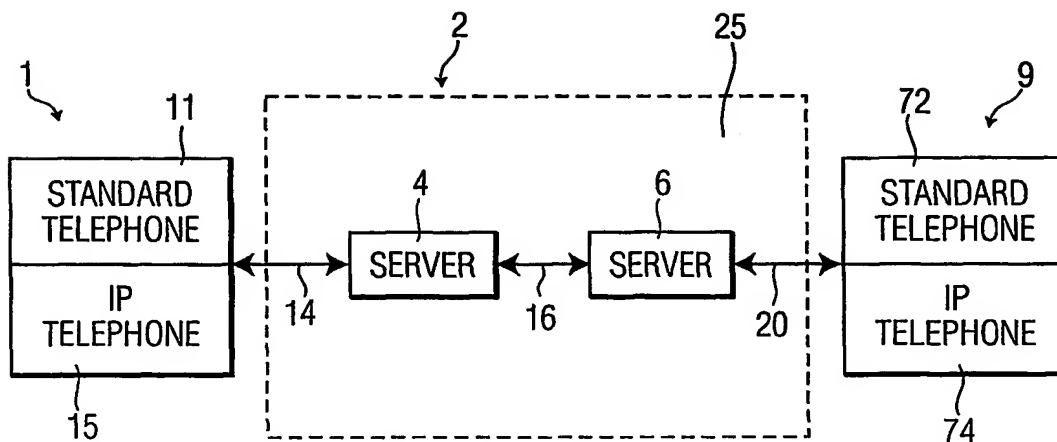


FIG. 1

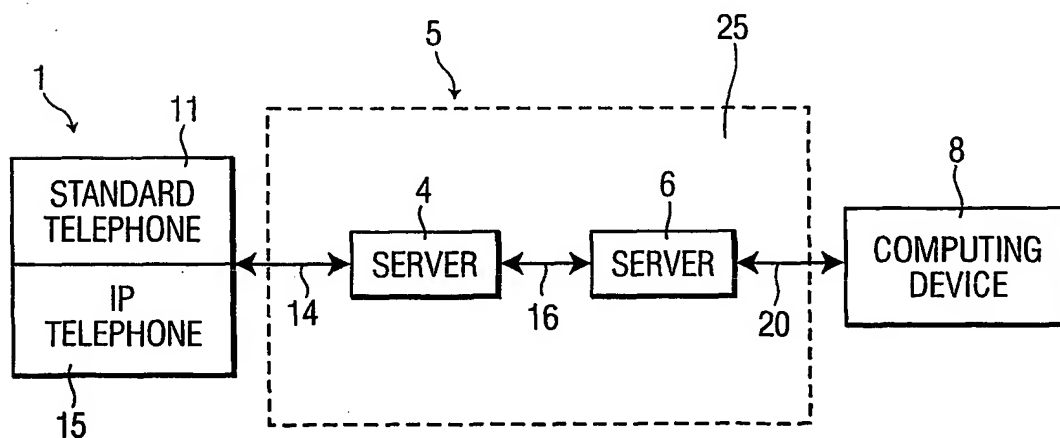


FIG. 2

2/3

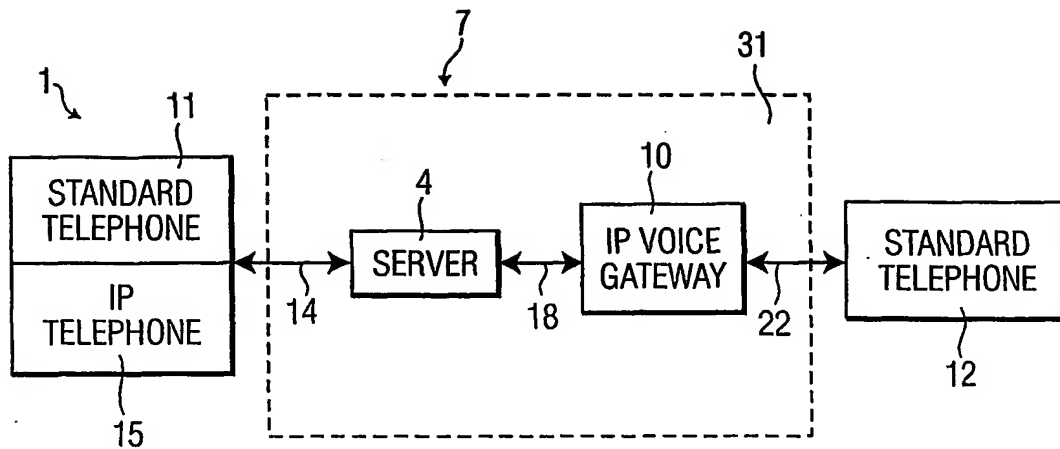


FIG. 3

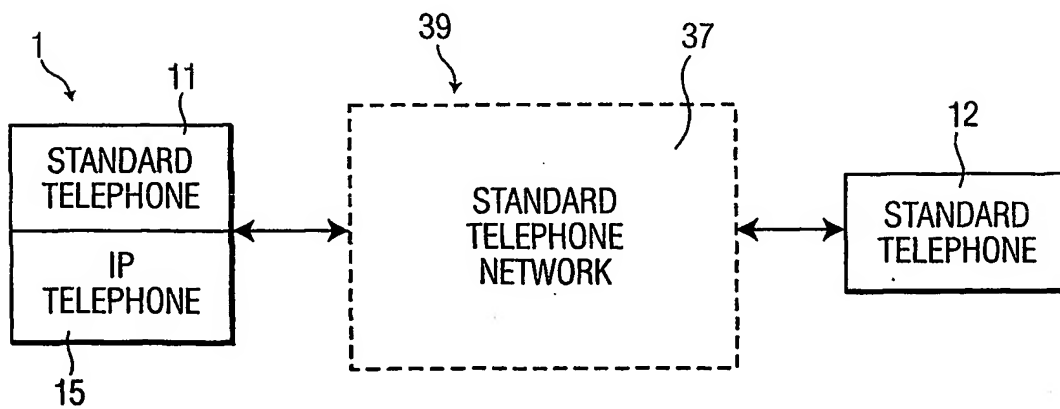


FIG. 4

3/3

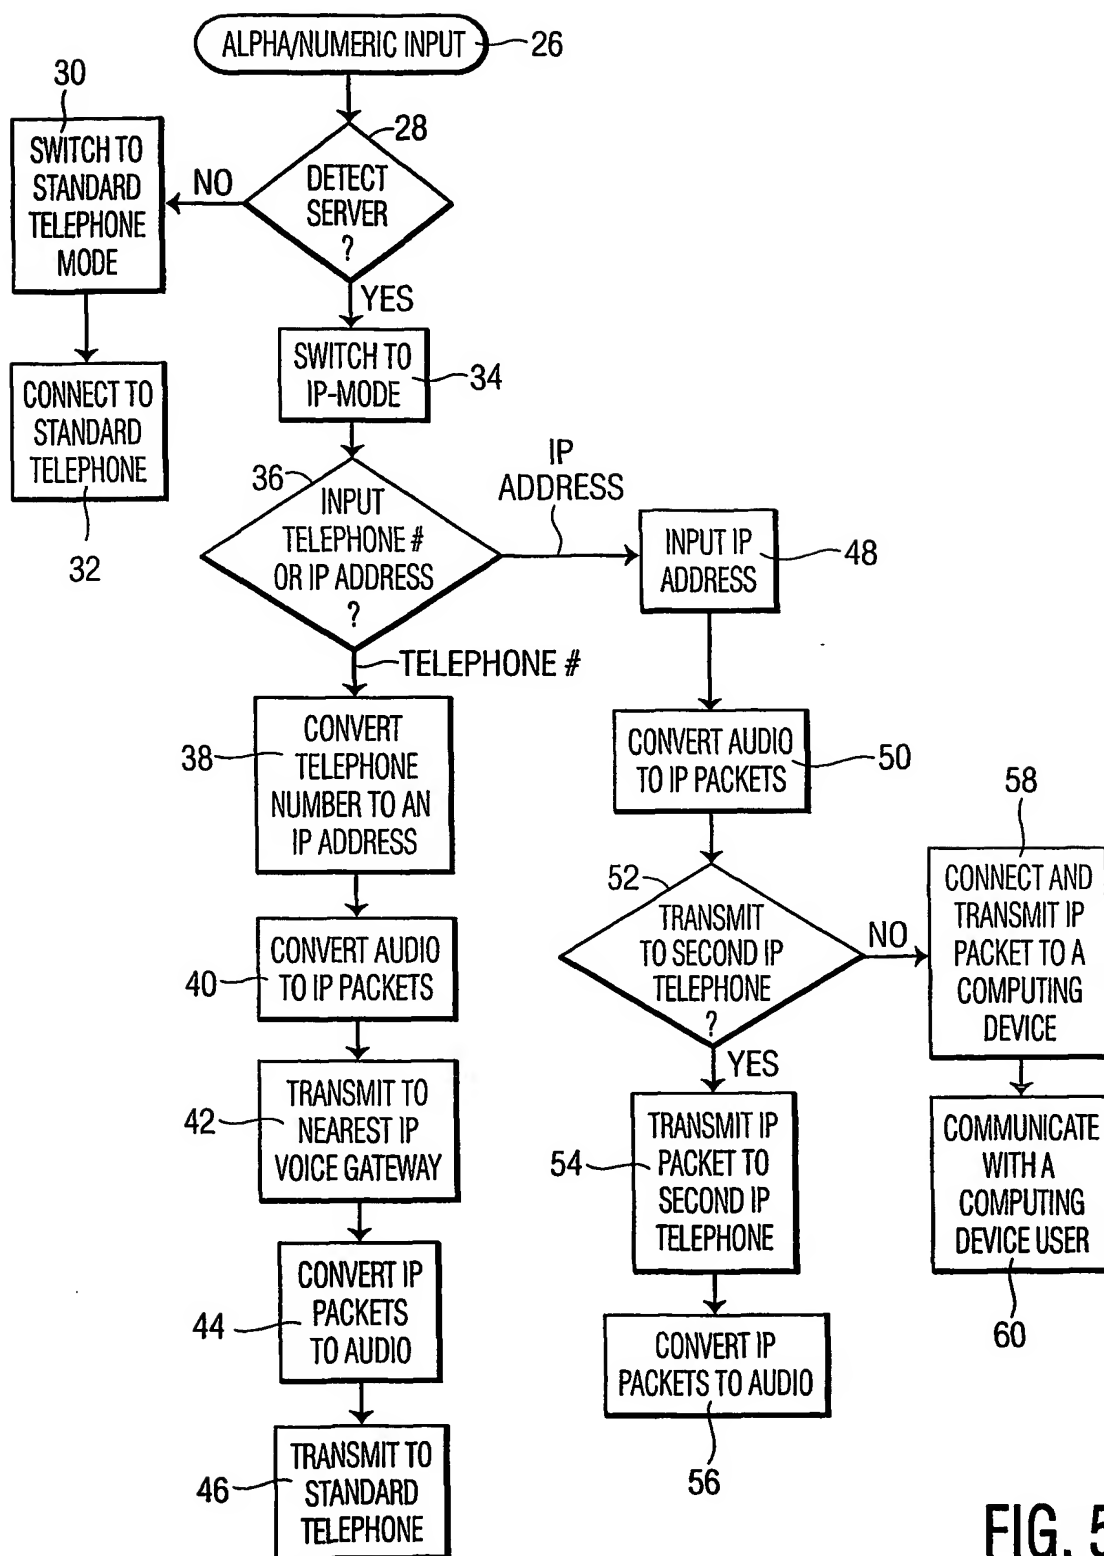


FIG. 5

INTERNATIONAL SEARCH REPORT

 Inter Application No
 PC 03/05456

 A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H04M1/253

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

 Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/089975 A1 (VAZIRI FARAMARZ ET AL) 11 July 2002 (2002-07-11) page 2, paragraph 0016 - paragraph '0020! page 3, paragraph 0044 - page 6, paragraph 0087; figures 1,2 page 7, paragraph 0100 - page 9, paragraph 0111; figures 5-8 page 12, paragraph 0160 - page 13, paragraph 0166; figures 9,12,13	1-23
X	WO 01/020890 A (INTERTEX DATA AB) 22 March 2001 (2001-03-22) page 6, line 1 - page 17, line 21; figures 1-3 ----- -/--	1-3, 6-11, 13-18,23

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

- *T* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the International search

11 February 2004

Date of mailing of the International search report

18/02/2004

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

Delangue, P

INTERNATIONAL SEARCH REPORT

Inter Application No
PC 03/05456

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 169 734 B1 (WILSON JAMES E) 2 January 2001 (2001-01-02) column 3, line 56 - column 6, line 35; figures 2,3	1-5, 8-10, 13-17, 19-21,23
A	GB 2 366 687 A (NTL GROUP LTD) 13 March 2002 (2002-03-13) the whole document	1-3, 7-10, 13-17,23
A	US 6 404 764 B1 (HOLLAND ROBERT VICTOR ET AL) 11 June 2002 (2002-06-11) column 2, line 11 - column 3, line 37; figures 1-4 column 9, line 27 - column 10, line 65	1-3, 6-10, 13-18,23
A	US 2001/046237 A1 (LEE NATHAN JUNSUP ET AL) 29 November 2001 (2001-11-29) paragraph '0027! - paragraph '0057!; figures 1-8	1-3, 6-10, 13-18,23
A	US 2002/105946 A1 (TAKEUCHI YOJI) 8 August 2002 (2002-08-08) paragraph '0024! - paragraph '0060!; figures 1-8	1-3, 13-17,23

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/JP03/05456

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 2002089975	A1	11-07-2002	US 6377570 B1 AU 6666898 A EP 0966815 A1 WO 9837665 A1	23-04-2002 09-09-1998 29-12-1999 27-08-1998
WO 0120890	A	22-03-2001	AU 6041300 A CN 1375159 T EP 1221251 A1 JP 2003509974 T WO 0120890 A1	17-04-2001 16-10-2002 10-07-2002 11-03-2003 22-03-2001
US 6169734	B1	02-01-2001	AU 5618998 A WO 9830007 A1	31-07-1998 09-07-1998
GB 2366687	A	13-03-2002	NONE	
US 6404764	B1	11-06-2002	US 6141341 A EP 1112646 A1 JP 2002524977 T WO 0014935 A1	31-10-2000 04-07-2001 06-08-2002 16-03-2000
US 2001046237	A1	29-11-2001	JP 3202003 B2 JP 11355474 A	27-08-2001 24-12-1999
US 2002105946	A1	08-08-2002	JP 2002237907 A	23-08-2002